



Easy Installation • Check Valve for Pump Protection • Solid Durable Construction for Long Life
A 2 Year Limited Warranty • Removable Lid for Easy Fill and Maintenance



Features and Benefits

- 1" Slip or FPT Connector on Inlet
- 1" FPT Connector on Pump Outlet
- Non-Pressurized Flow Center
- Foam Insulation which Eliminates Condensation
- Continual Purging of Air with Air Separation Chamber

The non-pressurized GT Flow Center pumping station is the heart of every energy efficient closed loop geothermal system. The GT Flow Center is designed to provide long, reliable operation, while providing simple & easy installation. The Flow Center can be mounted on the floor or on the wall. To install simply connect the return line from the earth loop to the GT Flow Center. Then connect the supply line (pump outlet) from the GT Flow Center to the heat pump unit. That's all there is to adding reliable pump protection to any closed loop system. Also available is the Flow Meter Tool (FMT17), an exclusive service tool which provides a direct reading of system flow rate, eliminating the uncertainty associated with other methods.

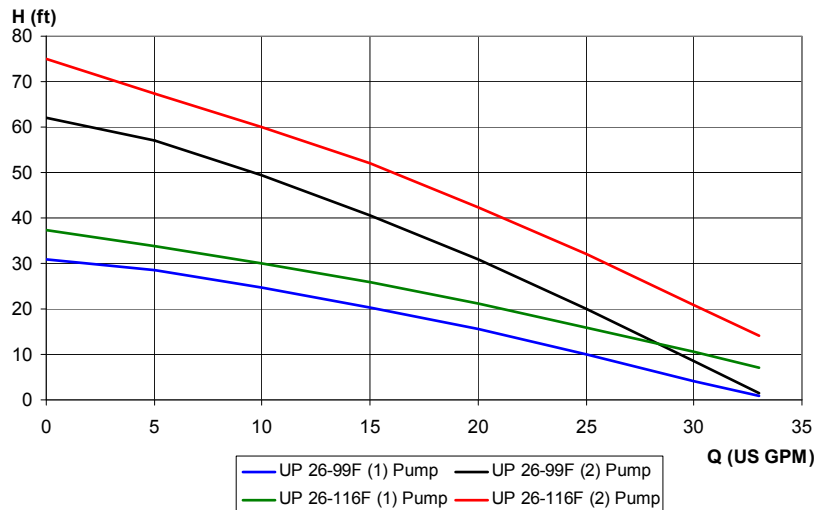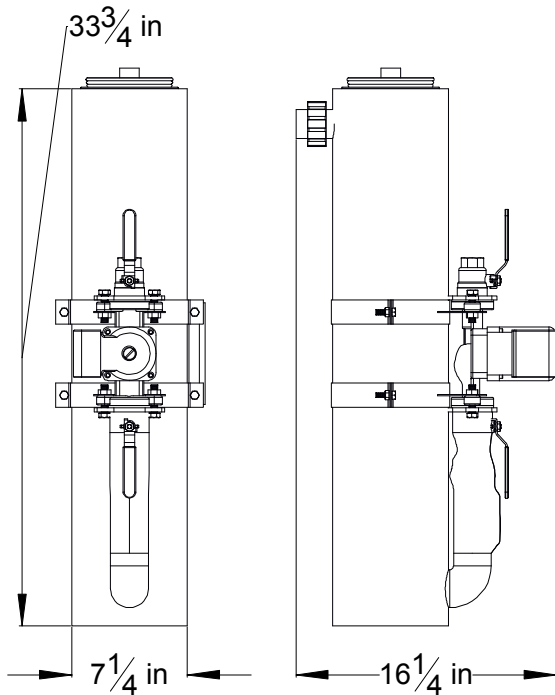

Part Number	# of Pumps	Voltage	Amps 26-99F	Amps 26-116F	HP (ea.)	Inlet/Outlet Size	Overall Size (in.)			Weight (lbs.)
							Height	Width	Depth	Shipping
GT0	0	N/A	N/A	N/A	N/A	1" Slip or FPT / 1" FPT	35"	9-1/4"	18"	23
GT1	1	230	1.07	1.8	1/6 hp					35
GT2	2		2.14	3.6						47

Note: UP 26-99F comes standard, UP 26-116F is optional