

Easy Installation • Check Valve for Pump Protection • Solid Durable Construction for Long Life
A 2 Year Limited Warranty • Removable Lid for Easy Fill and Maintenance



Features and Benefits

- 1-1/4" IPT Connection on Inlet
- 1-1/4" FPT Connection on Pump Outlets
- Non-Pressurized Flow Center
- Foam Insulation which Eliminates Condensation
- Continual Purging of Air with Air Separation Chamber



The non-pressurized 2-Circuit KT Flow Center pumping station is the heart of every energy efficient closed loop geothermal system. The KT Flow Center is a field assembled flow center that is designed to provide long, reliable operation, while providing simple & easy installation. The system should be mounted on the floor. To install, simply connect the return line from the earth loop to the KT Flow Center. Then connect one supply line (pump outlet) from the KT Flow Center to a heat pump unit. Then connect the other supply line from the KT to the other heat pump unit. That's all there is to adding reliable pump protection to any closed loop system. Also available is the Flow Meter Tool (FMT17), an exclusive

service tool which provides a direct reading of system flow rate, eliminating the uncertainty associated with other methods.

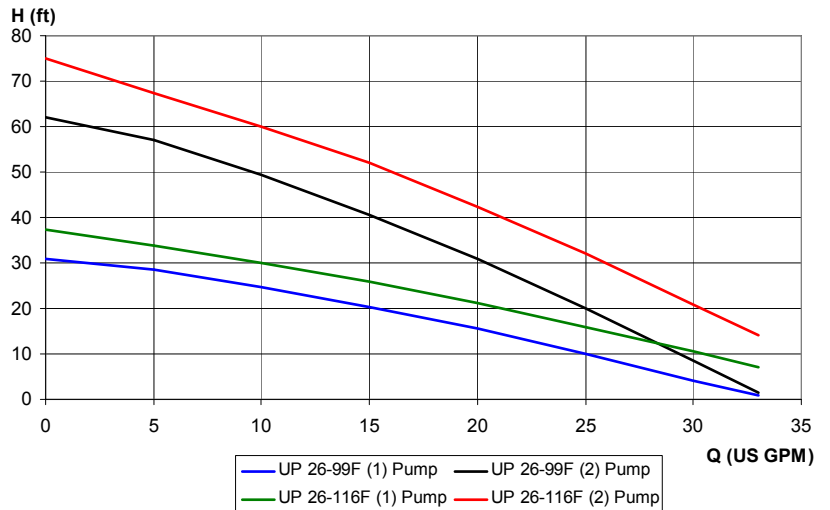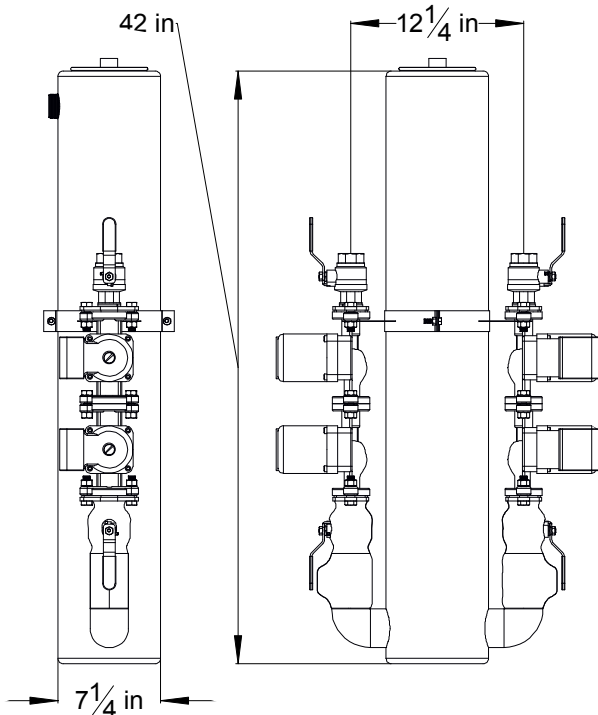

Part Number	# of Pumps	Voltage	Amps 26-99F	Amps 26-116F	HP (ea.)	Inlet/Outlet Size	Overall Size (in.)			Weight (lbs.) Shipping
							Height	Width	Depth	
KT0x0	0	230	1.07	1.8	1/6 hp	1-1/4" IPT / 1-1/4" FPT	43"	22-1/2"	9-1/4"	40
KT1x1	2		2.14	3.6						62
KT2x1	3		3.21	5.4						73
KT2x2	4		4.28	7.2						84

Note: UP 26-99F comes standard, UP 26-116F is optional