



Easy Installation • Check Valve for Pump Protection • Solid Durable Construction for Long Life
A 2 Year Limited Warranty • Removable Lid for Easy Fill and Maintenance



Features and Benefits

- 1" Swivel Connector on Pump Inlet
- 1" Swivel Connector on Pump Outlet
- Non-Pressurized Flow Center
- Foam Insulation which Eliminates Condensation
- Continual Purging of Air with Air Separation Chamber

The non-pressurized QT Flow Center pumping station is the heart of every energy efficient closed loop geothermal system. The QT Flow Center is designed to provide long, reliable operation in an attractive cabinet, while providing simple & easy installation. The stylish insulated cabinet provides flexible installation without feeling the need to hide it out of sight. The system should be mounted on the floor. To install simply connect the return line from the earth loop to the QT Flow Center. Then connect the supply line (pump outlet) from the QT Flow Center to the heat pump unit. That's all there is to adding reliable pump protection to any closed loop system. Also available is the Flow Meter Tool (FMT17), an exclusive service tool which provides a direct reading of system flow rate, eliminating the uncertainty associated with other methods.

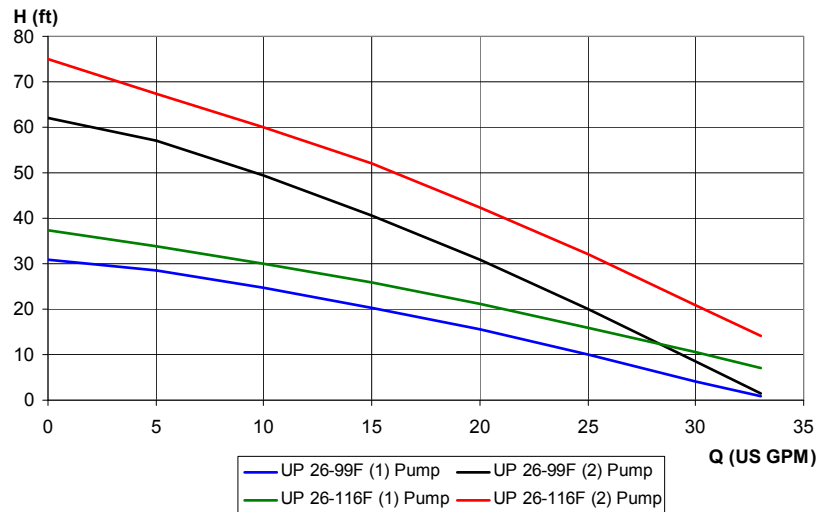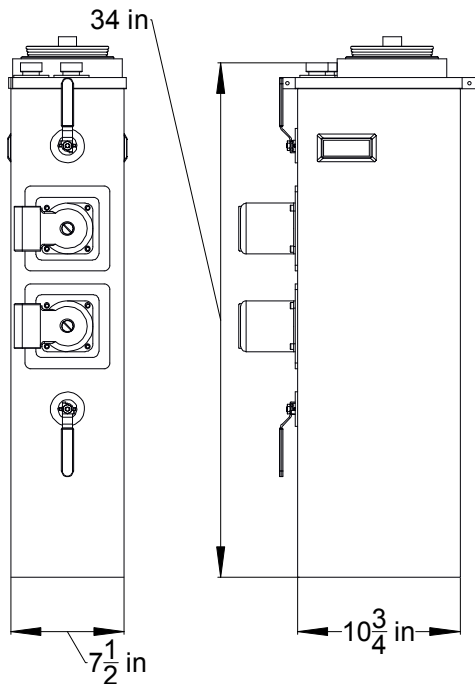

Part Number	# of Pumps	Voltage	Amps 26-99F	Amps 26-116F	HP (ea.)	Inlet/Outlet Size	Overall Size (in.)			Weight (lbs.)
							Height	Width	Depth	Shipping
QT1	1	230	1.07	1.8	1/6 hp	1" Swivel (FPT)	36"	7-3/4"	16"	44
QT2	2		2.14	3.6						55

Note: UP 26-99F comes standard, UP 26-116F is optional